

NP 801(DT)



FEATURES

- Microprocessor based numerical relay
- Current measurement based on fundamental frequency
- Low-set definite time relay
- High-set instantaneous relay
- Separate low-set and high-set indicators
- Option to disable the high-set relay
- Front panel access to the test function
- Complies with IEC 60255 standard
- Programmable relay output contact

Technical Data

RATINGS

Rated current (I _n)	: 5 A
Frequency	: 50 Hz
Burden	: < 0.3 VA at I _n

AUXILIARY SUPPLY

Model NP801	: 220-240V AC
Frequency	: 50 Hz
VA rating	: 3 VA typical

SETTING RANGES

Low-set (I _o >)	: 0.1A to 5.0A (2% to 100%)
Low-set delay time (DELAY)	: 0.05 sec to 20 sec
High-set (I _o > >)	: 0.1A to 50A (2% to 1000%) or disable
High-set delay time (t _o > >)	: 0.05 sec to 20 sec
Setting range	: (0.00 to 10.0, step 0.05; 10.0 to 100 step 0.5)

CONTACTS

Trip contact (R1 & R2)	: Manual reset / Auto reset type
Contact Arrangement	: Change-over
Contact rating	: 5 A, 250 V AC (cosφ = 1)
Contact material	: Silver alloy
Expected electrical life	: 100,000 operations at rated current
Expected mechanical life	: 5 x 10 ⁶ operations

PERFORMANCE

Adjustable accuracy	: Less than 5%
Repeatability	: Less than 0.5% of full scale

MECHANICAL

Mounting	: Panel mounting
Front panel	: Standard DIN 96mm x 96mm
Approximate weight	: 0.37kg


ENVIRONMENTAL CONDITIONS

Temperature	: -5°C to +55°C
Humidity	: 56 days at 93% RH and 40°C non-condensing

INDICATORS

Auxiliary supply	: Red indicator
Pick-up	: Red indicator
Trip	: Red indicator




Earth Fault Relay

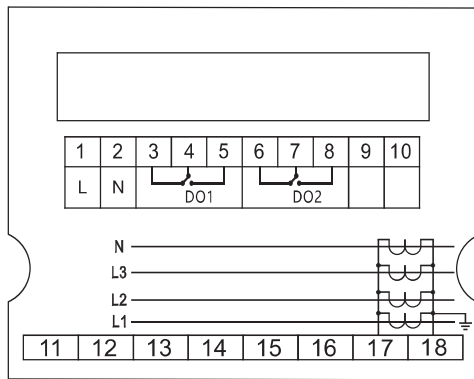

Ordering Information

MODEL	DESCRIPTION
NP 801	For 50 Hz auxiliary voltage 220-240V AC

CASE DIMENSION



Earth Fault Relay(DT)

NP 801